



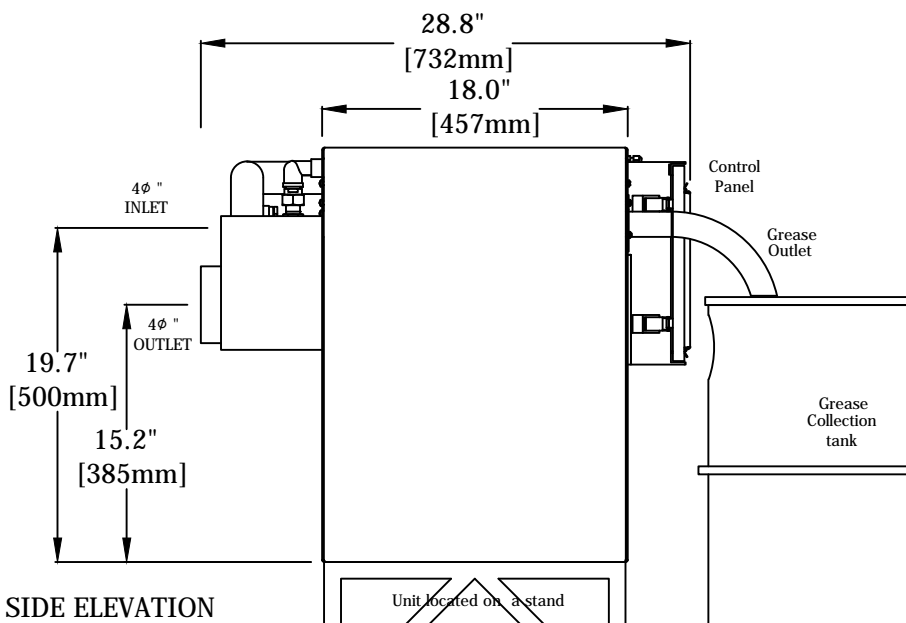

# GGX125 AST Grease Guardian Standard Specification

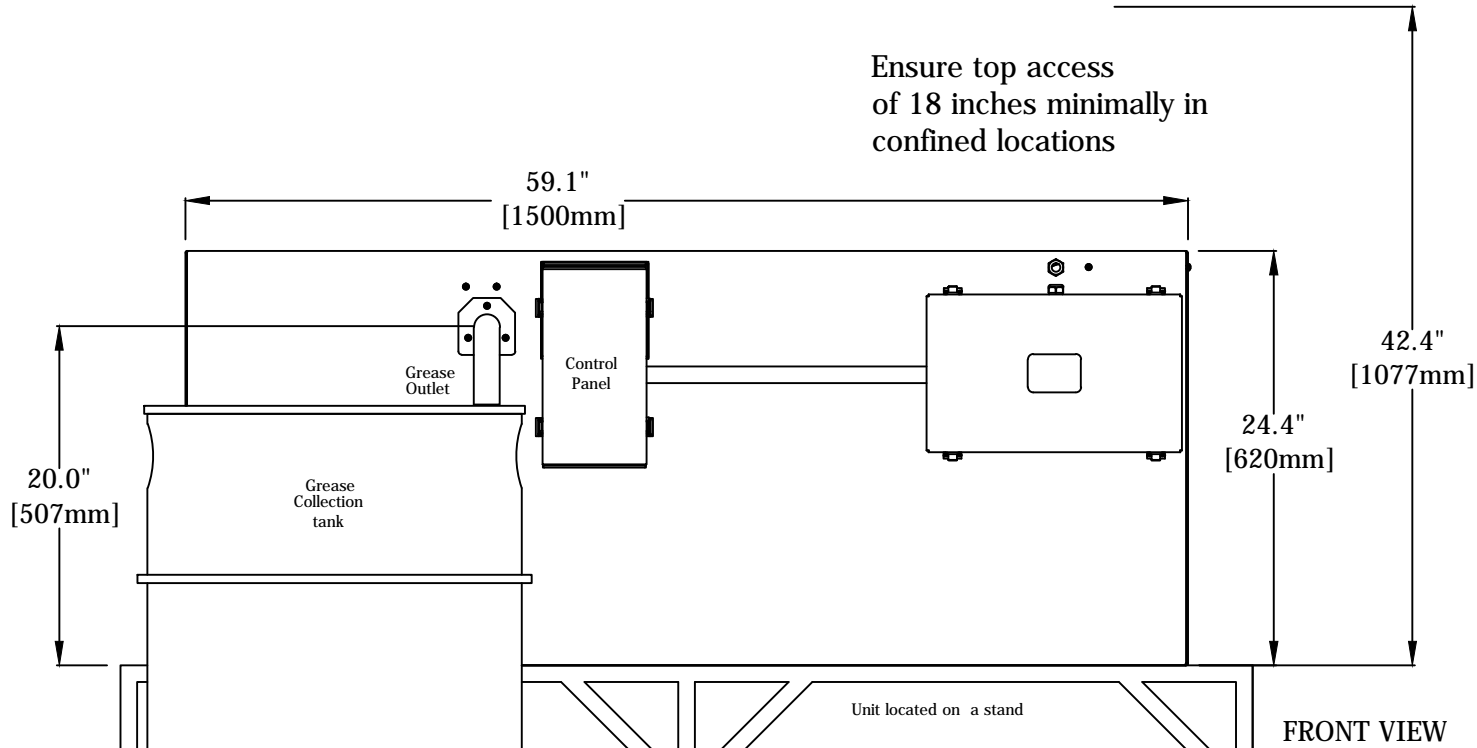

## GREASE GUARDIAN X AST STANDARD FEATURES:

- 3 Year Guarantee
- Fully Automatic Grease Removal Unit (AGRU)
- 14 gauge 304 stainless steel welded tank
- Fully sealed air tight lid
- PLC/HMI automatic controller
- Energy saving mode
- Skimming drum with automatic spray bar wash
- Automatic spray bar wash for surface conditioning
- Screen mesh with automatic spray bar wash
- Automatic Solids Transfer (AST) pump
- Grease Guardian World asset management

## TECHNICAL DATA

Net weight (empty)	290 pounds
Gross weight (filled with water)	950 pounds
Exterior Materials	14 gauge AISI304 Stainless Steel
Interior Materials	AISI304 Stainless Steel & Acetal Components
Maximum Flow Rate	125 GPM
Solids transfer pump rating (flow/head max)	70gpm/13.5psi (16m3h/9.5m)
Skimming Rate	20 pounds per hour
Grease Retention Capacity	250+ pounds
Hot wash water system operation requirements	12gpm @ 43.5psi (temperature 100-140°F)
Programming/Control	7day, 24hr multi-function PLC
Electrical Load	110VAC, 1670W, 18A max*

\* Current absorbed depends on pump discharge head